

Section 27 Town 6N Range 3W

April

1942
18

I commenced a Survey of Section 27, T. 6N, R. 3W
for Fred Thomason and Wife and
Ophia Jackson

Agreement of both parties.

William Cole
Gerald Baker

C. B.

Jack M. Intyre
Surveyor Greene County.

Var.

Course.	Point of Beginning.	feet Chains Distance.	Corrected Bearings.
---------	---------------------	-----------------------------	------------------------

North	1/4 South	2607	to Center 1/4 Stone.	N 3 1/2° E
-------	-----------	------	----------------------	------------

North	1/4 South	1303.5	to 1/8 Stone on the line running from the Center 1/4 to the South 1/4.	
-------	-----------	--------	--	--

Having established the North-South 1/2 Section line and allowing for var. as shown in original survey of Town of Owensburg as recorded Surveyors Record # 4 pages 179-180, I surveyed and established ~~sets~~ lots 8-9-10 as shown in original survey.

Set Stones at the S.E. and the S.W. corners of lot 10. Fence post were set at the N.E. and the N.W. corners of said lot.

Also surveyed the land now owned by Fred Thomason in order that he might correct faulty deed description. Survey attached.


DESCRIPTION OF LAND OF FRED AND MILDRED THOMASON

Beginning at the southeast corner of lot number 10 in the Original Town of Owensburg, thence northeast 99 feet along the west side of High Street, thence north northeast 243 feet along said street, thence west 100 feet, thence west by northwest 50 feet to the southeast corner of land owned by Clara Lehman and Sentney Heirs, thence north west 153 1/2 feet to pin in County Road, thence south 122 feet to the northwest corner of lot number 8 in the original Town of Owensburg, thence southeast 231 1/2 feet along the north side of lots 8, 9, and 10 to the northeast corner of lot number 10, thence south along the east side of lot number 10, 214 1/2 feet to place of beginning.

Also all that part of lots 7, 8, and 9 lying north of the branch and that of lot number 9 east of the branch.

Information and Records
Document Is
Accurate to Original

CORNER ESTABLISHED.	Monument.	Device.	WITNESS POINTS OR BEARING TREES.	Mark or Dia. in Inches.	COURSE.	Links Distant.	REMARKS.
Found South 1/4	Sandstone X		elm	30"	approx. S 60° E	12.	Stone under fence
1/8 (as shown)	Sandstone X		no trees		N 60° W	25'	
Center 1/4	Sandstone X		10' North of N.E. Corner of Garage Iron Post Corn. of yard WAINUT	15"	N 80° E	17'	Center of road

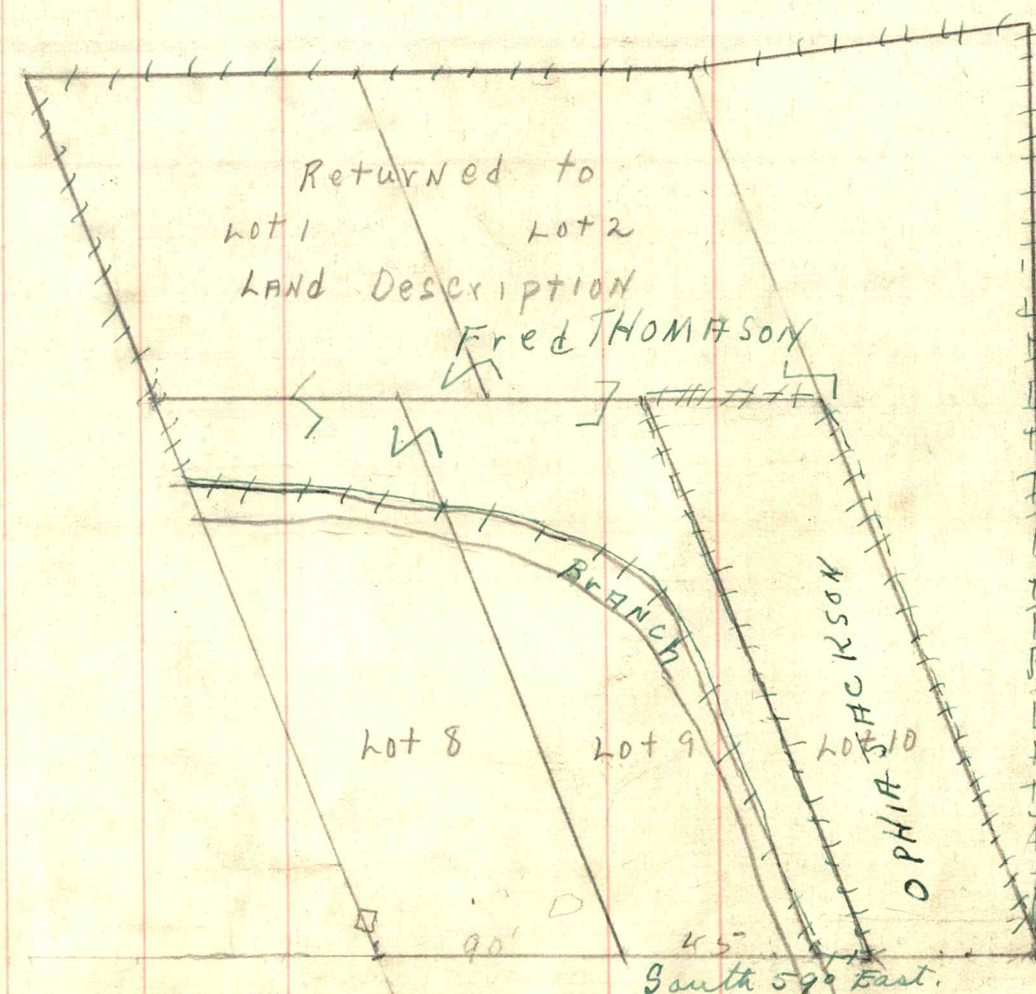

Note: Lots 1 and 2 returned to land description.